

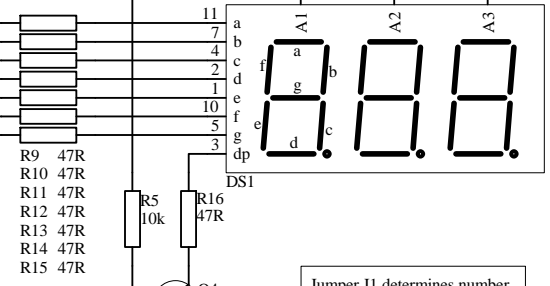


PA0 and PA1 can be used as I/O pins if the optional external crystal is not assembled.

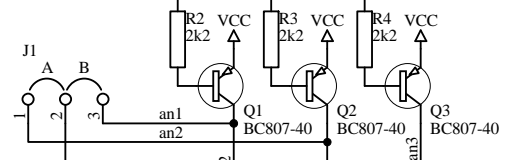

Jumper J1 determines number of decimal places  
 0 = leave open  
 1 = close A  
 2 = close B

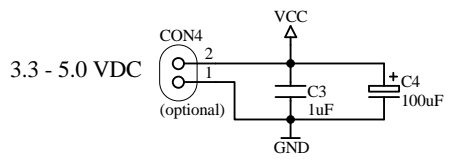

Title <b>ProtoCounter Tx13</b>		<b>fab4U</b>	
Frank Andre Dürkheimer Straße 54 D-67071 Ludwigshafen			
File ProtoCounter_Tx13.Sch		Size A4	Sheet 1 of 1